


Patented Screw and Anchor in One


# WALL DOG by Dottie

**WORKS IN  
ALL BASE  
MATERIALS**

3/16" pre-drilled hole required




Concrete



Hollow or Grout Filled Block



Brick



Plaster

No pre-drilling required



Wallboard



Plywood



## SIZE RANGE

3/16" Diameter x 1-1/4" Length

## ANCHOR MATERIAL

Case Hardened Steel

## SUITABLE BASE MATERIALS


Wallboard (1/2", 5/8" & double wallboard), Plywood, Concrete, Hollow or Grout Filled Block, Brick, Plaster

## FEATURES & BENEFITS

- Chrome Pan Head Fasteners
- Installs in wallboard, plywood, concrete, hollow or grout filled block, brick and plaster
- No second step, installs directly through fixture into wallboard
- Patented design provides for smooth entry, clean cutting and a powerful hold
- Thread design prevents spinning and stripping
- Heat treated point penetrates metal and wood studs
- When removed it leaves a much smaller hole than toggles or other systems
- Self-drills own small hole in wallboard
- Installs quickly and easily with a Phillips screwdriver
- Can be easily backed-out
- No need for shields
- All steel anchor
- No hole spotting



Part No. WDOG  
Contains:

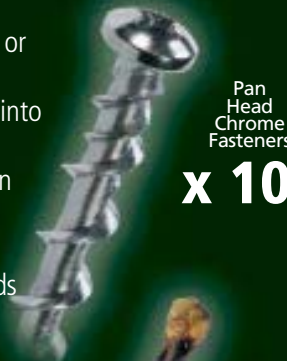

Pan Head Chrome Fasteners

**x 100**



3/16" Carbide tipped Drill Bit

**x 1**



#2 Phillips Power Bit

**x 1**



# Dottie

L.H. Dottie Co. Commerce, CA  
www.lhdottie.com

